

HC 170 Hydraulic Drifter



Hardworking

- Up to ST68 diameter for both surface and underground drilling
- High energy per blow for maximum penetration rate
- Robust body designed for extreme applications

Reliable

- Long maintenance intervals and extended wear parts lifespan
- Heavy duty front guide designed for large diameters rods

Efficient

- Large diameter holes with very low energy consumption
- Cost-saving drifter; lower operational costs and cost per cubic meter

Weight and dimensions	
Weight	326.5 kg
Overall length without shank	1,269 mm
Overall length with shank	1,525 mm
Overall width	410 mm
Height	326 mm
Height above shank axis	102 mm


Rotation specs	200cc	315cc
Maximum rotation speed (RPM)	130	130
Oil flow (I/min)	65	80
Maximum pressure (bar)	220	220
Maximum torque (Nm)	1612	2031

Impact rating	
Maximum output	22 - 26 kW
Input range	40 - 48 kW
Percussion flow range	160 l/min
Percussion pressure range	180 bar
Maximum impact frequency	2,460 bpm
Maximum impact energy	510 J

Flushing flow and pressure	
Water flushing	N/A
Front end lubricating air consumption at 3bar	300 l/min

Other versions are available; please contact the drilling technical support team for more information.

Penetration rate

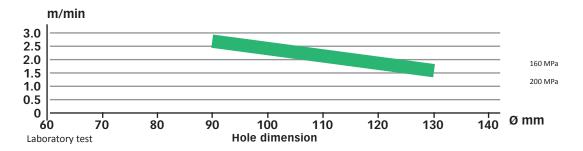

Shank adapters	CPN
D60 T45M	86718094
D60 T51M	86621604
D60 G60M	86765286

CPN depending on configuration
CPN depending on configuration



Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are Joy Global's standard written warranties, which will be furnished upon request.

 $\label{logos} \textit{Joy Global, Joy, Montabert, P\&H and related logos are trademarks of Joy Global Inc. or one of its affiliates.}$

© 2017 Joy Global Inc. or one of its affiliates. All rights reserved.